


# SAFETY JOGGER

## INDUSTRIAL

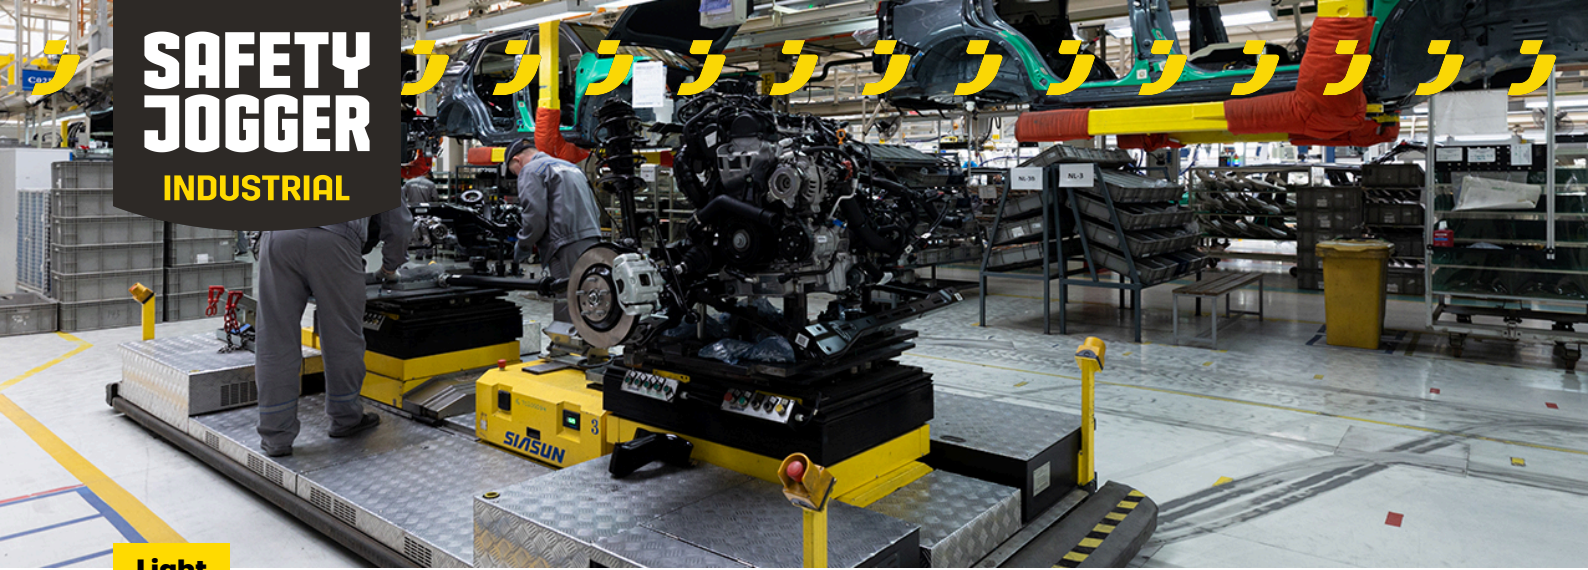

Light

## BESTKNIT S1P

BSTKNITS1P

modern safety trainer for women with textile upper and steel protection

Upper	TPU, Textile
Lining	Textile
Footbed	SJ foam footbed
Midsole	Steel
Outsole	PU/PU
Toecap	Steel
Category	S1P / SR, LG, ESD, FO
Size range	EU 35-43 / UK 3.0-9.0 / US 5.5-11.5 JPN 21.5-27 / KOR 230-280
Sample weight	0.470 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022+A1:2024



LBL



### Breathable upper

Increased moisture and temperature management for extended wearer comfort.



### Ladder Grip (LG)

Especially defined contour in the shank area of a safety shoe to provide additional safety while standing on ladders.



### Non-marking outsole

Non-marking outsoles do not leave color marks on the ground.



### Scuff Cap (SC)

Separately tested material to cover the toe cap area to reduce abrasion of the upper material (e.g. during kneeling operations) and extend usability of the safety shoe.



### S1P

You work in dry environments, no risk of water/liquid sprays, and you need protection for your toes, protection against perforation, and a good breathability? Then you need S1P safety footwear.

**Industries:**

Assembly, Automotive, Industry, Logistics

**Environments:**

Dry environment, Extreme slippery surfaces

**Maintenance instructions:**

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
<b>Upper</b>	<b>TPU, Textile</b>			
	Upper: permeability to water vapor	mg/cm <sup>2</sup> /h		≥ 0.8
	Upper: water vapor coefficient	mg/cm <sup>2</sup>		≥ 15
<b>Lining</b>	<b>Textile</b>			
	Lining: permeability to water vapor	mg/cm <sup>2</sup> /h		≥ 2
	Lining: water vapor coefficient	mg/cm <sup>2</sup>		≥ 20
<b>Footbed</b>	<b>SJ foam footbed</b>			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles		25600/12800
<b>Outsole</b>	<b>PU/PU</b>			
	Outsole abrasion resistance (volume loss)	mm <sup>3</sup>		≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction		≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction		≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction		≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction		≥ 0.22
	Antistatic value	MegaOhm		0.1 - 1000
	ESD value	MegaOhm		0.1 - 100
	Heel energy absorption	J		≥ 20
<b>Toecap</b>	<b>Steel</b>			
	Impact resistance toecap (clearance after impact 100J)	mm		N/A
	Compression resistance toecap (clearance after compression 10kN)	mm		N/A
	Impact resistance toecap (clearance after impact 200J)	mm		≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm		≥ 14

Sample size: 38

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.