


# SAFETY JOGGER

## INDUSTRIAL

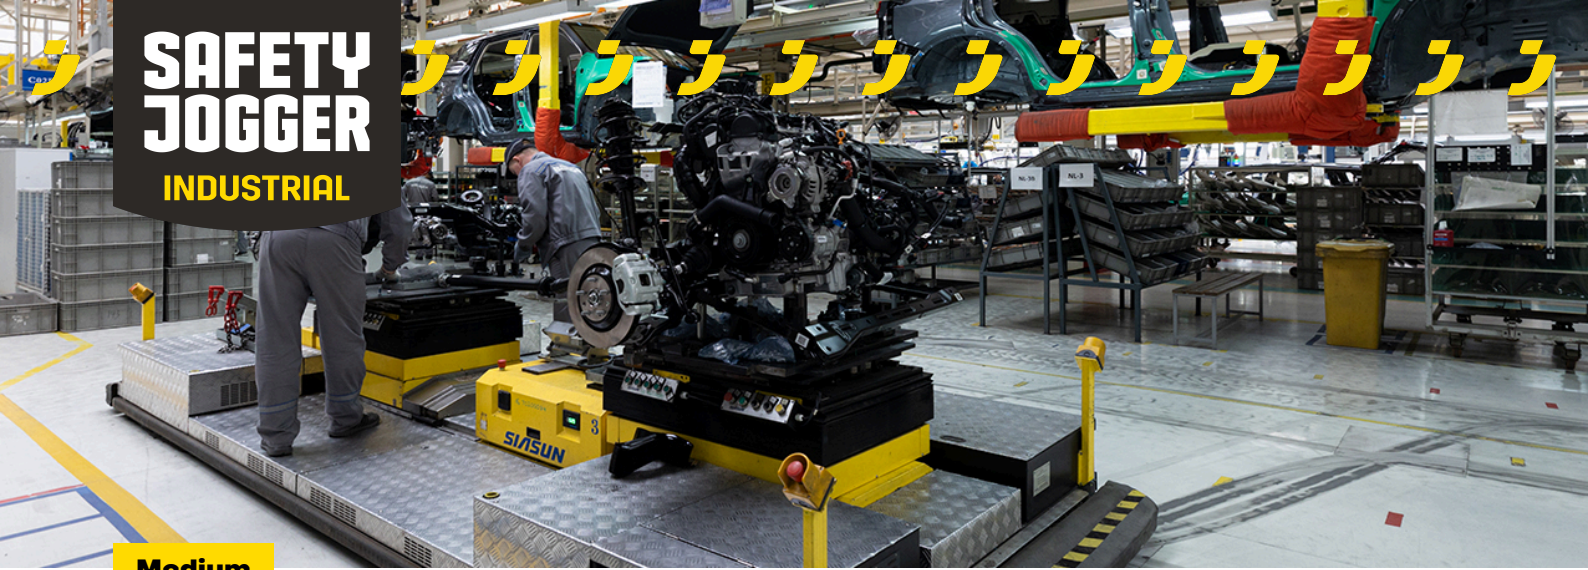

Medium

## BESTLADY S3 MID

BSTLDYS3M

**2nd generation of Bestlady for multipurpose applications. Full leather upper with improved fit and comfort.**

The BESTLADY S3 mid-cut safety shoe provides robust protection with a steel toecap and midsole, breathable leather upper, slip-resistance, and ESD-certification. Ideal for various industries, it offers excellent value.

Upper	Full Grain Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	Steel
Outsole	PU/PU
Toecap	Steel
Category	S3 / SR, LG, ESD, CI, FO
Size range	EU 35-43
Sample weight	0.525 kg
Norms	EN ISO 20345:2022+A1:2024 ASTM F2413:2024



BLK



### Breathable leather upper

Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



### Ladder Grip (LG)

Especially defined contour in the shank area of a safety shoe to provide additional safety while standing on ladders.



### Removable insole

Renew your insole at a regular base or use your own orthopedic insoles for a higher comfort.



### Slip resistance (SR)

Replaces the previously used term of SRA+SRB=SRC. SR means the slip test has been executed on tiles contaminated with soap and with oil.



### Steel toecap

Robust metal support to protect the feet of the wearer against falling or rolling objects.



### Steel midsole

Puncture resistant steel midsoles are made from stainless or coated steel and prevent sharp objects from penetrating the outsole.

**Industries:**

Assembly, Automotive, Industry, Logistics, Oil & Gas, Food & beverages

**Environments:**

Dry environment, Uneven surfaces, Wet environment

**Maintenance instructions:**

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
<b>Upper</b>	<b>Full Grain Leather</b>			
	Upper: permeability to water vapor	mg/cm <sup>2</sup> /h		≥ 0.8
	Upper: water vapor coefficient	mg/cm <sup>2</sup>		≥ 15
<b>Lining</b>	<b>Mesh</b>			
	Lining: permeability to water vapor	mg/cm <sup>2</sup> /h		≥ 2
	Lining: water vapor coefficient	mg/cm <sup>2</sup>		≥ 20
<b>Footbed</b>	<b>SJ foam footbed</b>			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles		25600/12800
<b>Outsole</b>	<b>PU/PU</b>			
	Outsole abrasion resistance (volume loss)	mm <sup>3</sup>		≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction		≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction		≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction		≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction		≥ 0.22
	Antistatic value	MegaOhm		0.1 - 1000
ESD value	MegaOhm		0.1 - 100	
	Heel energy absorption	J		≥ 20
<b>Toecap</b>	<b>Steel</b>			
	Impact resistance toecap (clearance after impact 100J)	mm		N/A
	Compression resistance toecap (clearance after compression 10kN)	mm		N/A
	Impact resistance toecap (clearance after impact 200J)	mm		≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm		≥ 14

Sample size: 38

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.